



STAINLESS STEEL GROW LIGHT

The Horner Stainless Steel Grow Light is a sealed, washdown/rainproof fixture. It has undergone several tests and has met specific guidelines for growing safety. This offers you peace of mind that you're buying a fixture that has been tested in multiple environments. Our Grow Light is perfect for any application in the Growing Industry, including starting seedlings in greenhouses, cloning, nurseries, vertical farming and more. Let Horner help you grow your business!

LONG LIFETIME

- 5 year warranty backed by U.S. company founded in 1949
- Aluminum thermal management ensure LEDs run cool for longer life
- Resistant to moisture, dust, and impact, reducing maintenance costs and down time
- Water-proof design does not rely on adhesives which can fail over time
- Rated IP69K
- Stainless Steel construction
- Rated for 50,000 hours at L80

FULL CIRCLE DESIGN

- Engineered with quality, metal frame
- Fuller spectrum with green and yellow content and wide range for deep red and far red
- Integrated driver minimizes fixture impact - sleek, minimal design ideal for tight/low spaces
- **Waterproof/Washdown/Dustproof**
- 120-277 VAC
- Ideal for typical wet environments of -20 to 40° C (-4 to 104° F)
- Aluminum Rebreather

ILLUMINATING RESULTS

- Clear polycarbonate light diffuser produces smooth, even light output
- Typical mounting heights of 6' - 12'

POSSIBLE APPLICATIONS

- | | | |
|------------------|--------------------|-------------------|
| ■ Greenhouses | ■ Vertical farming | ■ Farm to table |
| ■ Indoor growing | ■ Research | ■ Nursery centers |

MODEL / SKU	WEIGHT	DIMENSIONS (in)		WATTS	LIGHT OUTPUT PPF
		Diameter	Length		
ETG-SST4-1050-P1-C29 SL-P69X4-50-GW	4.5 lbs	2.95	47.24	50	80
ETG-SST4-1050-P1-C40 SL-P69X4-50-GWR	4.3 lbs			50	105


Fixture comes with S316 Hanging Cables for suspended mounting;
Can be daisy-chained up to 6 fixtures*
*typical spacing - max 16'



*Accessory kit standard; optional additional cable (purchased separately):
Kit includes - hanging clips, end cap and mounting hardware (shown)



Cable: MCC00028F
wire is 16 AWG
*sold by the foot


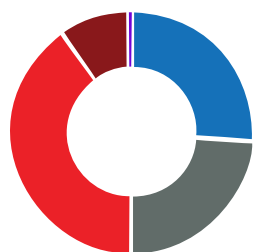


Color Ratios

■ Red: 40.16%
■ Far Red: 9.73%
■ Blue: 26.14%
■ Green: 23.94%
■ UV: .04%

LIGHTING SPECTRUM LED Color Option C29 Purple/White

■ 1.6 $\mu\text{Mol/watt}$

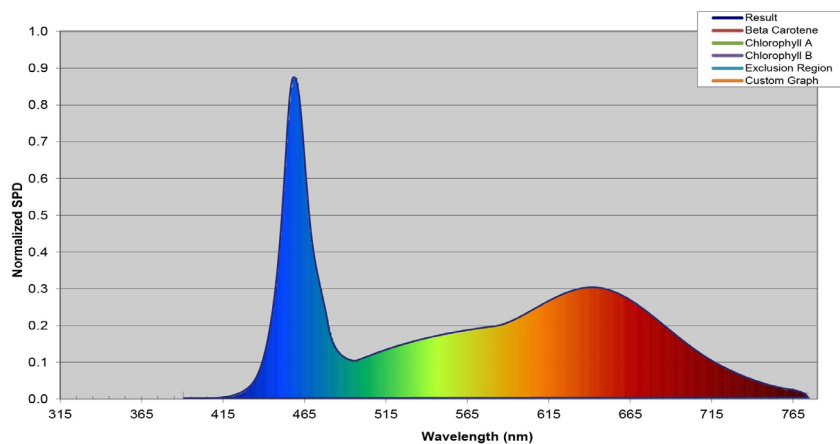

Color Ratios

■ Red: 43.54%
■ Far Red: 1.78%
■ Blue: 17.61%
■ Green: 37%
■ UV: .06%

LIGHTING SPECTRUM LED Color Option C40 White/Deep Red

■ 2.1 $\mu\text{Mol/watt}$

