



CCT & POWER TUNABLE EDGE-LIT PANEL LIGHT

These Edge-lit, low-profile fixtures reorient the light source to the panel and ensure brightness, providing a skylight-like appearance, even distribution, and a powerful value. They offer tunable wattage and dimming for enhanced light control. Our Flat Panels are extremely light and minimal - making them easy to install, and aesthetically pleasing to your current design.

LONG LIFETIME

- 5 year warranty backed by U.S. company founded in 1949
- Aluminum thermal management ensure LEDs run cool for longer life
- Quality driver resists typical noise and surge in office environments

BRIGHT SAVINGS

- Typical payback of 6 - 24 months
- 0-10 Dimming standard
- Up to 110 lumens/watt
- Utilize integrated dimming for additional energy savings

FULL CIRCLE DESIGN

- Output of 2,200 - 5,500 lumens
- Engineered with quality, metal frame
- Units are designed to mount in ceiling grid; optional surface-mount
- Easy installation in tight places like ceilings with shallow plenums and the unit can be replaced in seconds
- CCT & Wattage tunable

ILLUMINATING RESULTS


- 80 CRI standard enhances color and clarity
- Smooth, even distribution, spreads light out over entire surface
- Acrylic light pipe diffuser replicates skylight-like appearance
- Typical mounting heights of 8' - 20'

POSSIBLE APPLICATIONS

- Office space
- Retail environments
- Commercial
- Schools
- Garages
- Inspection lighting

MODEL / SKU	CRI	CCT*	LUMENS	TOTAL WATTS	VOLTAGE	L70
ETG-T24 IK-FP24-00XX-DY-XX-J	80	3500K, 4000K, 5000K	3,300/4,400/5,500	30W/40W/50W	120-277VAC/ 50-60HZ	>50,000
ETG-T22 IK-FP22-00XX-DY-XX-J	80		2,200/3,300/4,400	20W/30W/40W		>50,000
ETG-T14 IK-FP14-00XX-DY-XX-J	80		2,200/3,300/4,400	20W/30W/40W		>50,000

panel size
ETG-T 24
 24 (2x4)
 22 (2x2)
 14 (1x4)

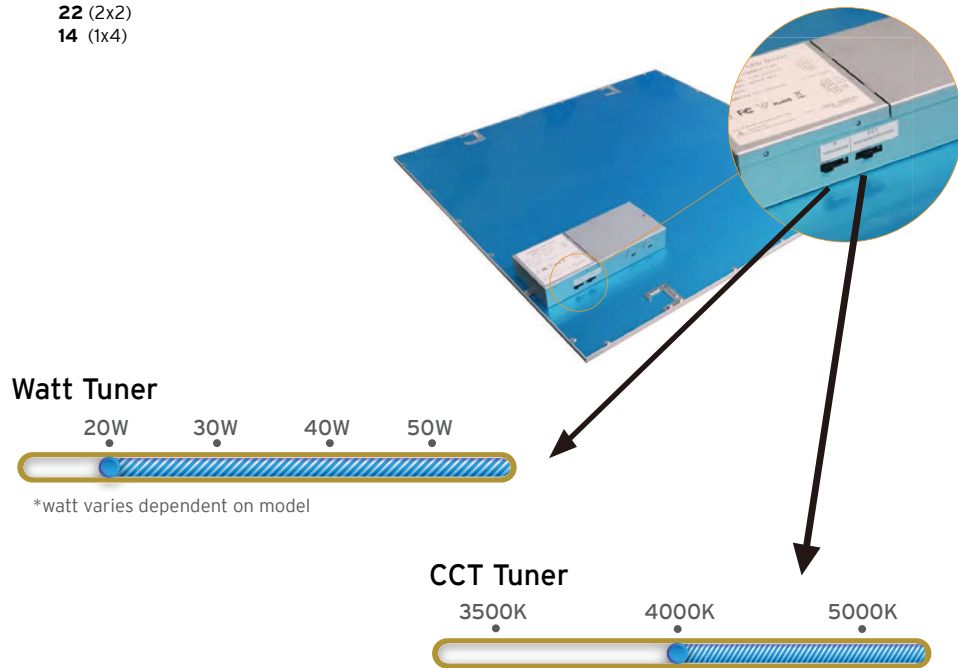

Emergency Battery ETG-TRO-BAT-R2



Output Power
 10 Watts (Max Load)
Output Voltage
 10-60V DC
Input Power
 3.7 Watts (Max)
Input Voltage
 120-277 VAC, 50-60 Hz

Emergency Operation
 >90 Minutes
Operating Temp
 0° to 55° C
Battery
 NiCd
Recharge
 24 Hrs
Dimensions
 L 13.3" X W 2.4" X H 1.5"